

24" (23.6" viewable) Full HD Ergonomic LED Monitor with Advanced Connectivity



Stunning Color Performance with SuperClear® MVA Panel Technology

VG2439Smh



Available for this model:
**Privacy Filter
Screen Protector**
VSPF2360
(Sold Separately)

Designed to meet the stringent needs of any business environment, the ViewSonic® VG2439Smh monitor delivers. With future-proof connectivity options including DisplayPort, HDMI, VGA, and USB inputs, you can connect to your heart's content for compatibility to a variety of high-definition and analog devices – today and tomorrow. Experience superior image quality with SuperClear® MVA panel technology, and enjoy complete comfort using the fully adjustable ergonomic stand. Spare your eyes from fatigue with ViewSonic's exclusive ViewMode™, Flicker-free, and Blue Light Filter technologies—all designed to deliver a more comfortable viewing experience. So whether purchasing dozens or hundreds of monitors, you can be confident that the VG2439Smh delivers the feature-rich options your office needs.

Key Features:

SuperClear® MVA panel technology for stunning color performance and wide-angle viewing

Future-proof HDMI, DisplayPort, and VGA inputs

Ergonomic tilt, pivot, swivel and height-adjustable design for maximum comfort and productivity

Exclusive ViewMode™ technology delivers superior color rendering and intuitive settings

Flicker-free and Blue Light Filter technology for more comfortable viewing.

Designed for:

Business


Education

Government

24" (23.6" viewable) Full HD Ergonomic LED Monitor with Advanced Connectivity



VG2439Smh

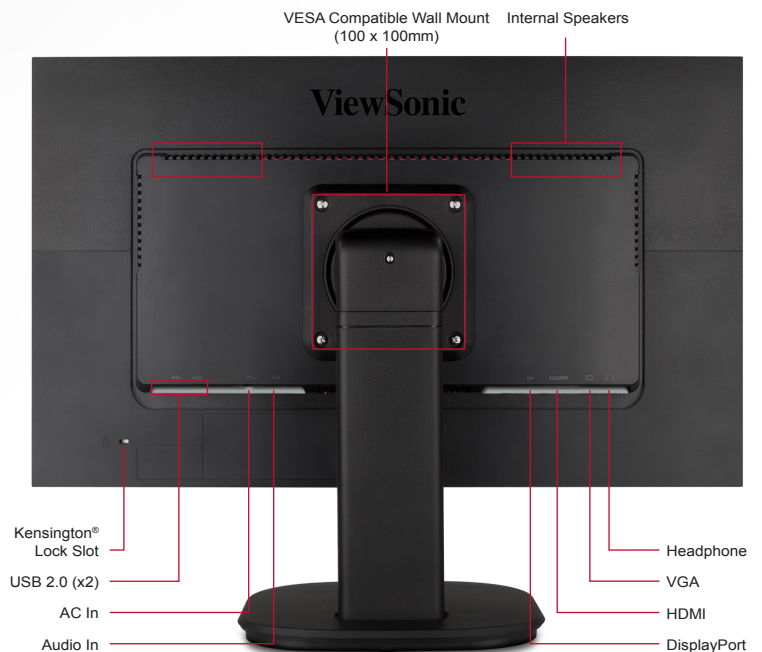

Specifications

LCD PANEL	Type	Color Active Matrix TFT LCD
	Display Area	20.5" horizontal x 11.5" vertical; 23.6" diagonal
	Optimum Resolution	1920x1080
	Brightness	250 cd/m ² (typ.)
	Contrast Ratio	3,000:1 (typ.)
	Dynamic Contrast Ratio	20,000,000:1
	Viewing Angles	178° horizontal, 178° vertical
	Colors	16.7M (6-bit + FRC)
	Response Time	6.5ms (GTG)
	Backlight	White-light LED
	Backlight Life	30,000 hours (min.)
	Panel Surface	Anti-glare, hard-coating (3H)
VIDEO INPUT	Digital	VGA, DisplayPort, HDMI
	Frequency	Fh: 24~82kHz, Fv: 50~75Hz
	Sync	Separate Sync, Composite Sync, Sync on Green
AUDIO OUTPUT	Speakers	2-watt (x2)
COMPATIBILITY	PC	Up to 1920x1080 non-interlaced
	Mac®	Up to 1920x1080
CONNECTOR	Video In	VGA, DisplayPort, HDMI
	Audio In	3.5mm mini jack
	Audio Out	3.5mm mini jack
	USB Hub	USB 2.0 (x2), USB upstream
	Power	3-pin plug (CEE22)
CONTROLS	Front Panel Buttons	Power, 1, Up, Down, 2
	OSD	Auto Image Adjust, Contrast/Brightness, Input Select, Audio Adjust, Color Adjust, Information, Manual Image Adjust, Setup Menu, Memory Recall (See user guide for complete OSD functionality)

ERGONOMICS	Tilt	Forward 5° / Back 20°
	Swivel	360°
	Rotation	90°
	Height	0-135mm
POWER	Voltage	AC 100-240V (universal), 50 / 60Hz
	Consumption	21.5W (typ.) / 36W (max.)
	Optimize	19W (typ.)
	Conserve	16W (typ.)
OPERATING CONDITIONS	Temperature	32-104° F (0-40° C)
	Humidity	10-90% (non-condensing)
DIMENSIONS (W x H x D)	Physical with Stand	22.1 x 17.1 x 9.4 in. / 560.3 x 435.2 x 239.6 mm
	Physical without Stand	22.1 x 13.1 x 2.3 in. / 560.3 x 331.7 x 58.2 mm
	Packaging	25.0 x 20.0 x 7.5 in. / 634 x 508 x 190 mm
WEIGHT	Net with Stand	11.4 lb. / 5.2 kg
	Net without Stand	8.2 lb. / 3.7 kg
	Gross	15.3 lb. / 6.9 kg
WALL MOUNT	VESA	100 x 100 mm
REGULATIONS		WEEE, RoHS, CE, CB, WHQL, UL/cUL, FCC-B, ENERGY STAR, EPEAT Gold, Mexico Energy
RECYCLE/DISPOSAL		Please dispose of in accordance with local, state, or federal laws
WARRANTY		Three-year limited warranty on parts, labor and backlight

Optional Accessories

HDMI to DVI cable 6FT	CB-00008948
Mini DisplayPort to DisplayPort Cable 6FT	CB-00010958
DisplayPort to DisplayPort Cable 30FT	CB-00010684
DisplayPort to DisplayPort Cable 6FT	CB-00010555
DisplayPort to DVI Adapter	LCD-CABLE-001

What's in the box?

VG2439Smh monitor, Power cable, VGA cable, DisplayPort cable, Audio cable, USB cable, Quick Start Guide, ViewSonic Wizard CD (User Guide)



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by TUV NORD.