PT-E550WVP






Industrial PC Labelling Machine

Create durable labels for electrical or datacom installations, via the easy-to-use built-in labelling functions, PC software or from your smartphone or tablet with the Brother cable labelling app.

- Large backlit graphic display
- Advanced cutter (including half cutter) for easy-to-peel labels
- Includes 2 tape cassettes, AC adapter, lithium-ion Battery, USB cable, hand strap and carry case
- Prints 3.5, 6, 9, 12, 18 and 24mm labels and heat shrink tube



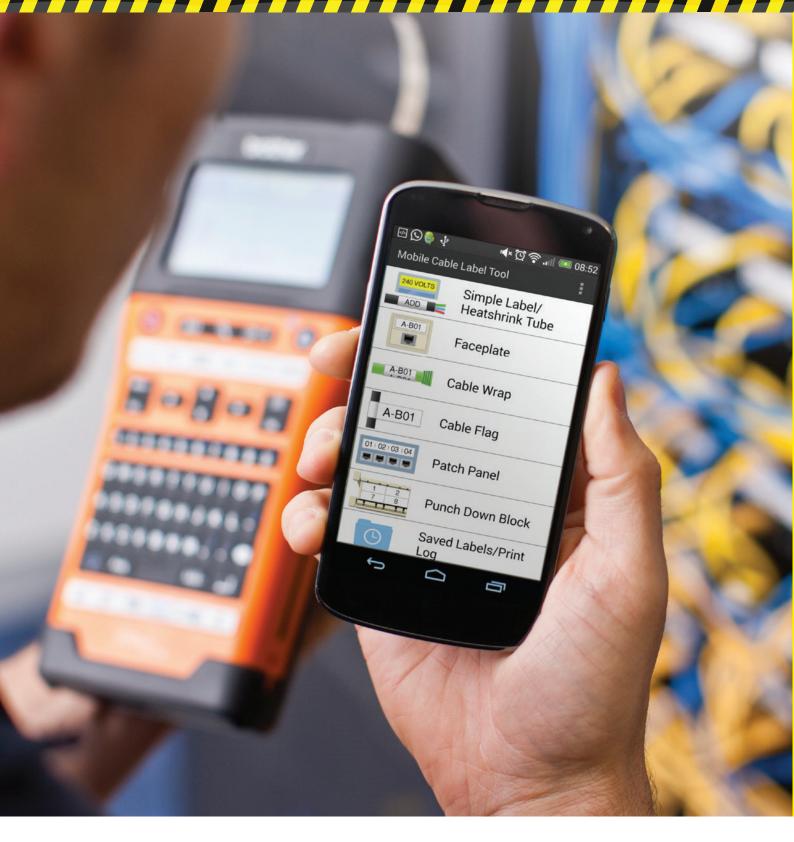

P-touch laminated labels – designed to last

Brother P-touch laminated TZe tapes are available in many different colours and sizes. The thermal transfer ink is sandwiched between two protective layers of PET (polyester film), protecting the text against the effects of liquids, abrasion, temperature, chemicals and sunlight. As the labels have been tested to the extreme, you can be confident of a professional quality label that has been designed to last.







Resistant















Water Resistant Abrasion Resistant Fade Resistant Chemical Resistant

Laminated

Easy Peel

Strong Adhesion

PT-E550WVP

Ensuring cables, conduits, switches and sockets are clearly identified with long lasting, durable labels is essential for electricians, datacom, telecom and security equipment installers.




PT-E550WVP

In addition to the extensive range of TZe tapes in various colours and sizes, specialist tapes for industrial use have been developed for specific labelling tasks including.



Flexible-ID Tape Use on curved sufaces, sharp bends or cylindrical surfaces.

Technical Specifications



Strong Adhesive Tape Use on uneven, rough and textured surfaces.



Heat-shrink tube Shrinks and grips cable when heat is applied.

Hardware

Maximum Characters per

Label Memory Locations

I abel

Display Type Interfaces Print Speed Maximum Tape Width Maximum Print Height Cutter Type Battery Type	16 chrs x 3 lines backlit graphic LCD with print preview USB 2.0, Wi-Fi, Wireless Direct 30mm / second (maximum) 24mm 18mm Automatic (Full & Half) BA-E001 Li-ion rechargeable battery (supplied) 6 x AA alkaline/rechargeable batteries (LR6/ HR6 - not supplied)
Label Creation	
Dedicated Labelling Functions Fonts Max. Lines per Label Max. text blocks Symbols Frames Barcodes Automatic numbering Copy Printing Vertical Text Printing	General; Faceplate; Patch panel; Punch block; Cable wrap; Cable flag; Heat shrink tube Serialise (automatic number incrementation) 14 fonts; 10 styles; 6-48 point size 7 (on 24mm width tape cassette) 99 384 7 9 protocols 1-99 1-99 Yes
Rotated text printing Memory	Rotate once; Rotate and repeat

1500

99

Supported Operating Windows Vista[®], Windows[®] 7, Windows[®] 8, Mac OS X 10.6 or greater Systems Cable Labelling Wizard Yes Font Faces All installed true-type fonts Font Styles 12 Image Import JPG, BMP, TIFF and other popular types Screen capture Yes Frames 153 21 protocols including 1D/2D barcodes Barcodes **Included Items** In the Box PT-E550WVP labelling machine 24mm black on yellow strong adhesive tape cassette (8m) 12mm black on white Flexible ID tape (8m) Li-ion rechargeable battery AC adapter Label design software and printer driver CD-ROM USB cable, wrist strap and user guide Supplies Tape type; Tape widths TZe tape cassettes; 3.5, 6, 9, 12, 18, 24mm HSe tube cassettes; 5.8, 8.8, 11.7, 17.7, 23.6mm **Optional Accessories** Batteries BA-E001 Li-ion rechargeable battery AA alkaline/rechargeable batteries (LR6/HR6) AC Adapter AD-E001 AC adapter

Weight and Dimensions

PC Software Main Features

126mm(w) x 250mm(h) x 94mm(d); 1.05kg



Label images shown are for illustrative purposes only and some aspects may not be reproducable on this model. Product specifications may be subject to change.